


C-13 落ちふた式U形側溝 (道路用鉄筋コンクリート側溝) JIS A 5372

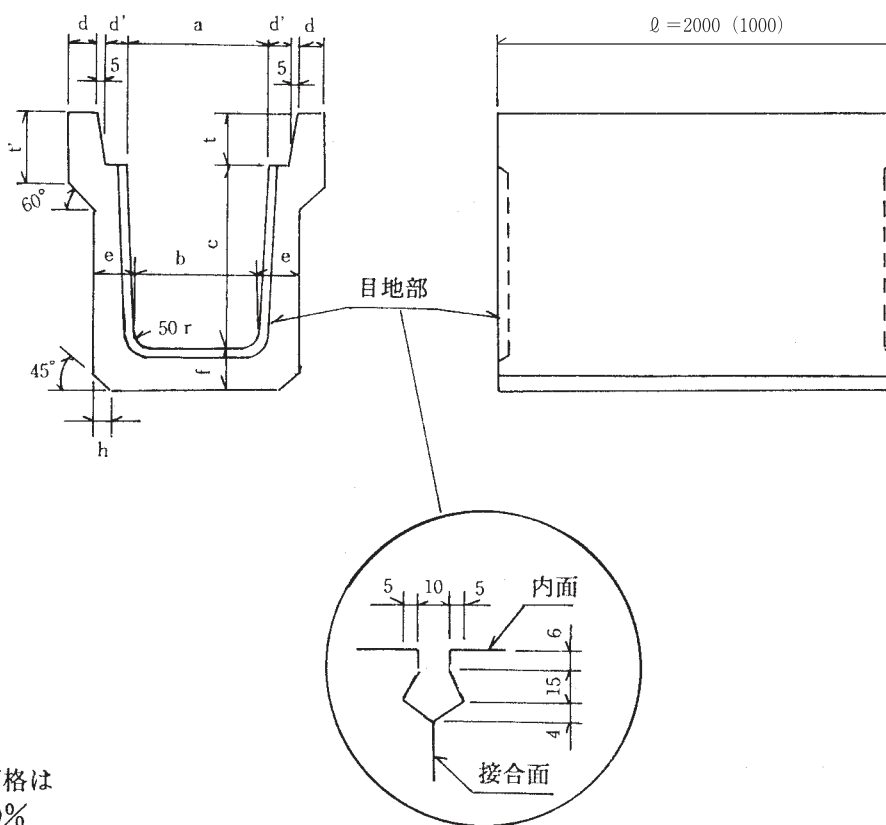

ℓ = 1000の価格は
ℓ = 2000の70%

※ 1種は歩道用

※ 3種はT-25荷重、吊り金具はインサートに充分差し込んで吊る事。

種類	名称	寸法 (mm)											参考重量 (kg)	価格 (円)	備考	
		a	b	c	d	d'	e	f	h	t	t'	r				ℓ
1種	250	250	230	250	40	55	55	55	20	90	120	50	2000	270	13,500	国土交通省 記号 Pu 2型
	300A	300	280	300	40	55	60	60	20	95	120	50	2000	326	16,000	
	300B	300	270	400	40	55	65	65	20	95	120	50	2000	395	19,300	
	300C	300	260	500	40	55	70	70	20	95	120	50	2000	470	23,000	
	400A	400	370	400	40	55	65	65	20	110	135	50	2000	432	21,100	
	400B	400	360	500	40	55	70	70	20	110	135	50	2000	503	24,700	
	500A	500	460	500	45	60	70	70	20	125	150	50	2000	561	27,600	
	500B	500	450	600	45	60	75	75	20	125	150	50	2000	648	32,000	
3種	250	250	230	250	45	55	65	65	30	90	120	50	2000	319	18,400	Pu 3型
	300A	300	280	300	50	55	70	70	30	95	140	50	2000	406	23,000	
	300B	300	270	400	50	55	70	70	40	95	140	50	2000	458	26,600	
	300C	300	260	500	50	55	80	80	40	95	140	50	2000	571	32,700	
	400A	400	370	400	55	55	70	70	40	110	140	50	2000	503	30,200	
	400B	400	360	500	55	55	80	80	40	110	140	50	2000	620	36,200	
	500A	500	460	500	60	60	80	80	40	125	155	50	2000	684	40,200	
	500B	500	450	600	60	60	90	90	40	125	175	50	2000	835	49,000	
許容差					± 3				—	± 3		—	± 6			